



# CHASSIS MOUNT SERIES

## DC Power Supply With Power Factor Correction and Battery Charging in 12, 24 and 48 Volt DC Models

The ICT Chassis Mount Series is designed for global markets, and features universal power factor corrected AC input, high efficiency of 90%, ultra low FCC Class B emissions, and is designed to global regulatory certification standards. Extended range operating temperature with temperature controlled cooling fan and threaded mounting positions make the Chassis Mount Series ideal for demanding or enclosed location applications.

Output voltage is adjustable using the provided trim pot. The Chassis Mount Series also incorporates current-limited battery backup terminals for float charging a battery as a standard feature.



### ELECTRICAL SPECIFICATIONS (All Models)

Input Voltage Range	100-265VAC
Frequency	50/60Hz
Power Factor	0.99 (typical, 120VAC input)
Efficiency (typical)	90% (typical, full load, 230VAC)
Output Voltage	input)
Line Regulation	13.8 / 27.6 / 55.2VDC (+/- 0.5%)
Load Regulation	< 0.1%
Output Ripple (typical)	< 0.2%
Input Connector	< 25mV rms
Output Connector	3 Position Terminal Block

### OUTPUT CURRENT

Model No.	Output Voltage Range <sup>(a)</sup>	Continuous Output
ICT24012-20CM	12.0-15.5 VDC	20 Amps
ICT24024-10CM	24.0-31.0 VDC	10 Amps
ICT24048-5CM	48.0 to 62.0 VDC	5 Amps

(a) Trim pot adjustable

### ENVIRONMENTAL

Operating Temperature Range	-30C to +60C (derate > 50C)
Cooling	Fan Cooled
Storage Temperature Range	-40C to +70C
Operating Environment	Indoor, Pollution Deg 2

### MECHANICAL

Height	1.85 inches (47 mm)
Width	4.22 inches (107 mm)
Depth	7.97 inches (203 mm)
Mounting	4 Integrated PEM Nuts #6-32
Grounding	6-32 stud located near input connector
Weight	2.05 lbs. ( 0.93kg)


### REGULATORY

CSA/UL 60950-1, FCC Part 15/B, EN60950-1, EN61000-3-2, EN55022, EN55024 (12/24V models only)

### PROTECTION FEATURES

- Input fuse to protect against AC input over current faults
- Battery fuse to protect against reverse battery connection or output circuit fault
- Over temperature shutdown
- Over voltage protection shuts down output automatically
- AC input under-voltage shutdown with automatic restart
- Current limited battery float charge to prevent battery damage
- Constant-current control of output with foldback

**OUTLINE DRAWING**

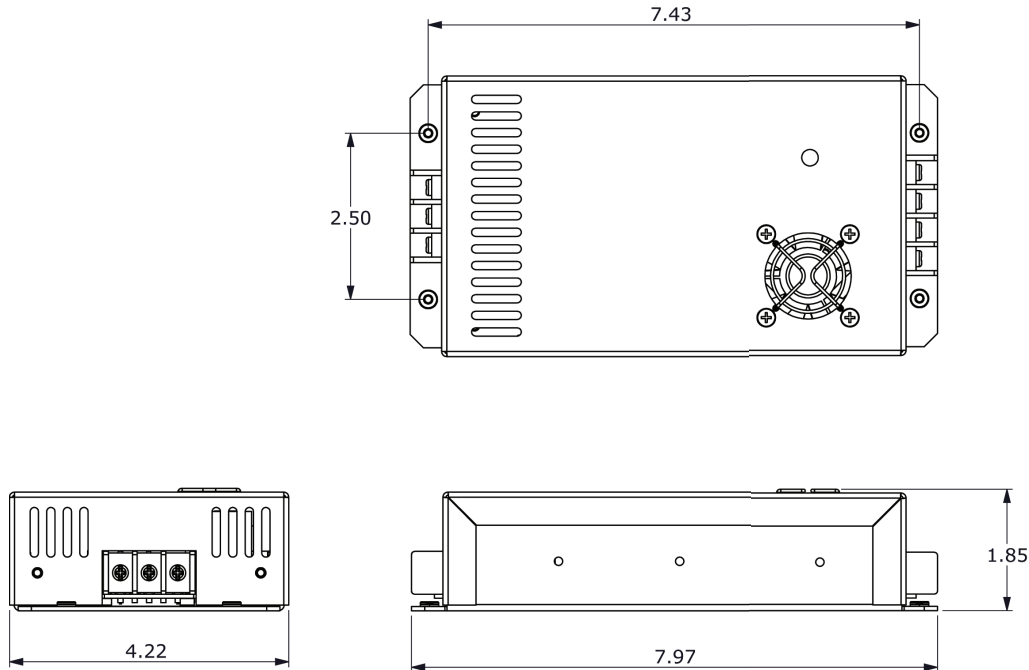

**ORDERING INFORMATION**

Description	Model Number
Chassis Mount Series DC Power Supply, 100-265VAC, 50/60Hz AC input, 20 Amp Continuous Output, 13.8 Volt DC	ICT24012-20CM
Chassis Mount Series DC Power Supply, 100-265VAC, 50/60Hz AC input, 10 Amp Continuous Output, 27.6 Volt DC	ICT24024-10CM
Chassis Mount Series DC Power Supply, 100-265VAC, 50/60Hz AC input, 5 Amp Continuous Output, 55.2 Volts DC	ICT24048-5CM

**TYPICAL APPLICATIONS**

The ICT Chassis Mount Series is ideal for mounting in enclosures, on sub-racks, or on other equipment. With high efficiency, a broad operating temperature range, adjustable output voltage, multiple protection features, standard battery backup current limited charging output, and integrated PEM mounting, the Chassis Series will power radios, repeaters, SCADA equipment, and other DC equipment while float charging a backup battery and providing DC UPS functionality for critical loads.

