
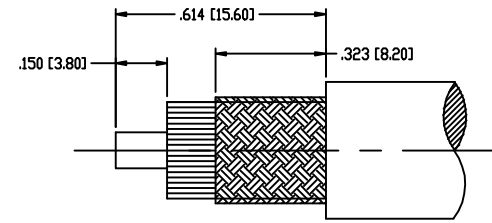
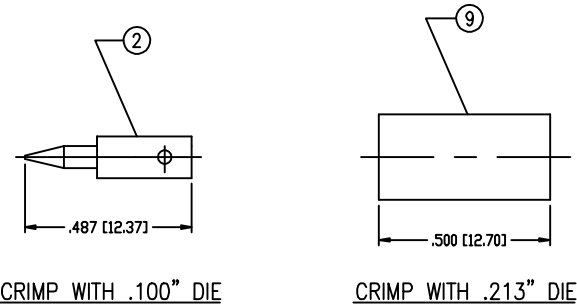


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

PART NO.		RFN-1009-C1		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	JDM	10/21/03	JDMc

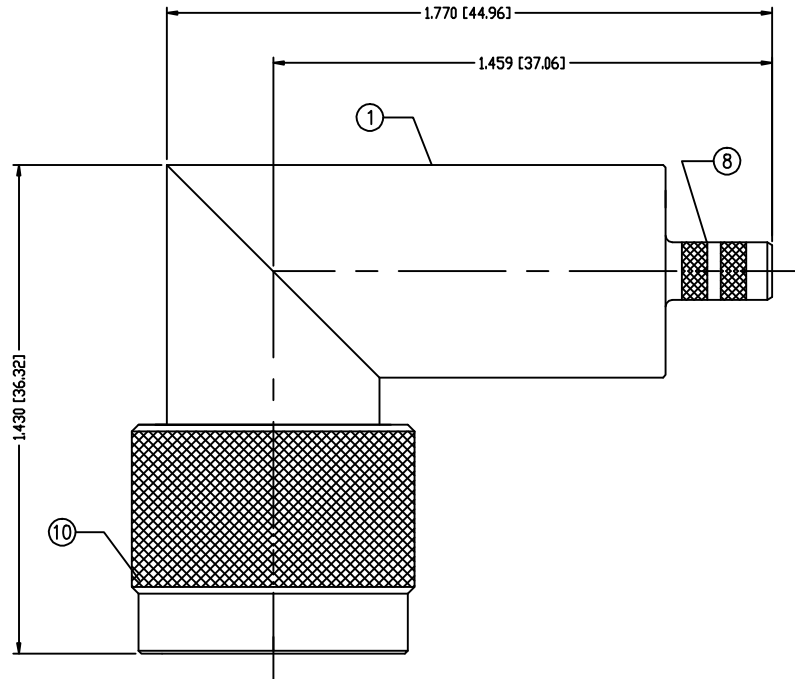

STRIPPING DIMENSIONS

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-11 GHz
 INSERTION LOSS: .06 dB Max. \sqrt{f} GHz
 WORKING VOLTAGE: 1k V rms @ sea level
 TEMPERATURE RANGE: -65°C TO 165°C
 INSULATION RESISTANCE: 5k M Ohms min.
 FOR: RG-55, RG-142, RG-223

1 BODY	1	BRASS	NICKEL, 100 μ" MAX
2 PIN	1	BRASS	GOLD, 3 μ"
3 PIN	1	BRASS	GOLD, 3 μ"
4 PIN	1	BRASS	GOLD, 3 μ"
5 DIELECTRIC	1	PTFE	---
6 DIELECTRIC	1	PTFE	---
7 GROUND RING	1	BRASS	NICKEL, 100 μ" MAX
8 P/F FER STUD	1	BRASS	NICKEL, 100 μ" MAX
9 FERRULE	1	BRASS	NICKEL, 100 μ" MAX
10 SHELL	1	BRASS	NICKEL, 100 μ" MAX
11 R/RING	1	BRASS	NICKEL, 100 μ" MAX
12 GASKET	1	S.I. RUB	
13			
14			

DRAWN	JDM	10/21/03
CHECKED		
ORJ DRAWN	JDM	10/21/03
APPROVALS		
DATE		

UNLESS OTHERWISE SPECIFIED:
 1. REMOVE ALL BURRS
 2. BREAK ALL CORNERS & EDGES .005 R. MAX.
 3. CHAMFER 1ST & LAST THREADS 45°
 4. SURFACE ROUGHNESS 63 FINISH MIL-STD-10
 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R.
 6. ALL DIMENSIONS ARE AFTER PLATING.

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
 UNLESS OTHERWISE NOTED TOLERANCES ARE:

DECIMALS	DIAMETER
.xxx±.003 [.08]	.xxx±.001 [.03]
.xx±.005 [.13]	.xx±.003 [.08]

RFconnectors 7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (858) 549-6340
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

N PLUG R/A

CRIMP

SIZE	CABLE GROUP	DWG NO.	REV
A	C1	RFN-1009-C1	-
SCALE:	NTS	CAD FILE	OUTLINE
SHEET 1		OF 1	