
	PAR	PT-4000-003-WB					
	REV	DESCRIPTION	DWN	DATE	APPROVED		
ſ	-	ENGINEERING RELEASE	CZS	02/07/11	JDMc		

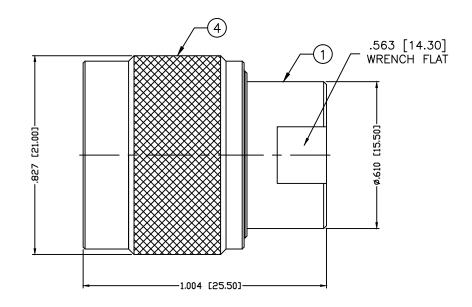

SPECIFICATIONS:

IMPEDANCE: 50 OHMS WORKING VOLTAGE: 1000 VRMS @ SEA LEVEL

V F	WORKING VOLTAGE: 10 FREQUENCY RANGE: 6 NSERTION LOSS: ≤ - SWR MAX: 1.3:1	CUSTOMER OUTLINE DRAWING ALL DIMENSIONS ARE REFERENCE ONLY					
7	SHELL	1	BRASS	WHITE BRONZE	UNLESS OTHERWI	SE SPECIFIED:	l
6	RETAINING RING	1	BRASS	WHITE BRONZE	DIMENSIONS ARE IN INCHES		
5	GASKET	1	RUBBER	AND [MILLIMETERS]			
4	GROUND RING	1	BRASS	WHITE BRONZE	DRAWN	02/07/11	ı
3	CONTACT	1	PHOS BRONZE	GOLD	C. ZUNIGA	02/07/11	ı
2	INSULATOR	1	PTFE		CHECKED		ı
1	BODY	1	BRASS	WHITE BRONZE	ORJ DRAWN		ł
#	DESCRIPTION	QTY	MATERIAL	FINISH	C. ZUNIGA	02/07/11	

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTENTS
INFORMATION PROPRIETARY TO
RF INDUSTRIES, ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.



7610 MIRAMAR RD.

UNIDAPT TO N PLUG

11 1 200										
SIZE	CABLE	GROUP	DWG NO.						REV	
А	N/A		PT-4000-003-WB					<u> </u>		
SCALE: NTS		ENGINEE	RING ID:	00	1560		SHEET	1	OF	1