

DRIIFT


Single-Wire Earpiece

Speaker SPECIFICATIONS

DYNAMIC MOVING COIL
Impedance $32\Omega \pm 15\%$ @1KHZ
Sensitivity $116 \pm 5\text{dB}$ @1KHZ
Resonance Freq (F0) $400\text{HZ} \pm 20\%$
Frequency Respond F0~9KHZ
Rated Input Power 200mW
Maximum Input Power 500mW

Microphone SPECIFICATIONS

Sensitivity Range: $-36 \pm 2\text{dB}$ RL=2.2K
Impedance: $2.2\text{K}\Omega$ 1kHz
Frequency: 50-16000Hz
Current: Max. $0.5\mu\text{A}$
Voltage: 1.0V-10V (DC)
Sound Pressure Level (SPL): 115dB S.P.L
S/N Ratio: $>58\text{dB}$ 1KHz

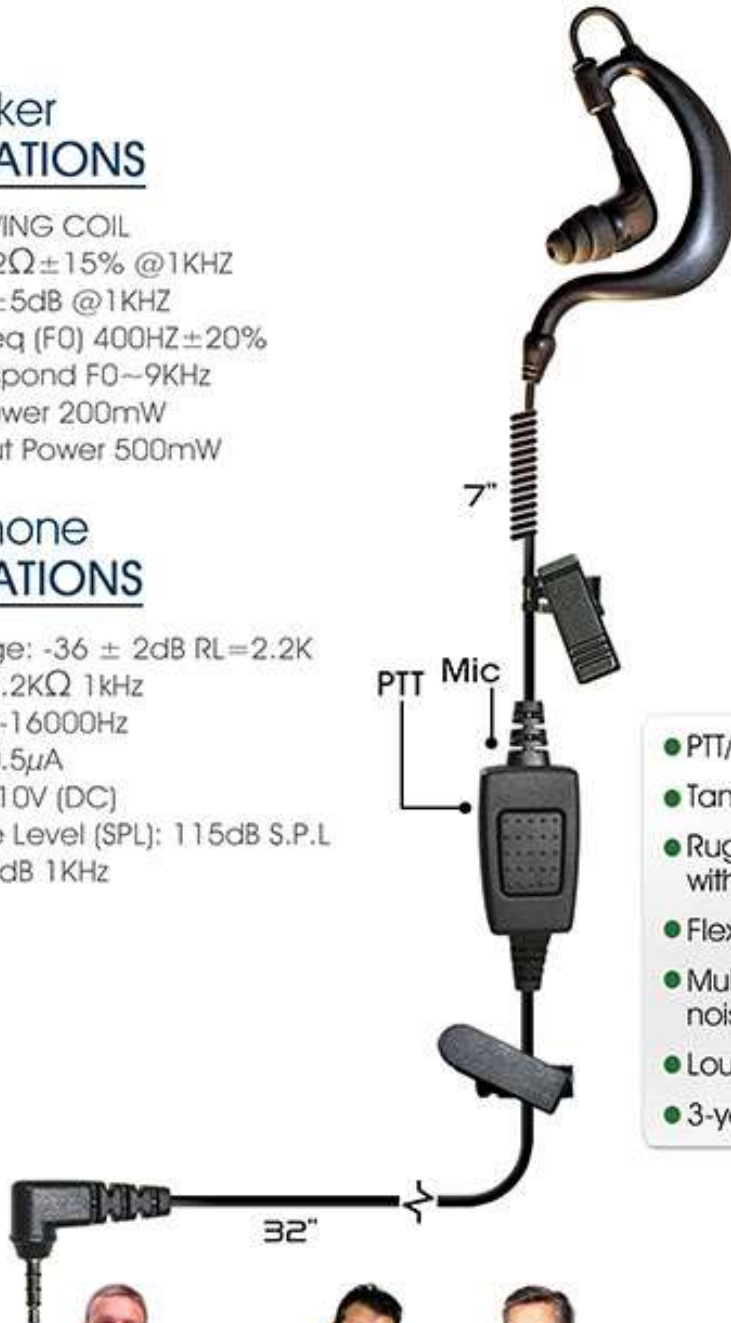

- PTT/Microphone - Earpiece with Speaker
- Tangle-Free 1 Wire.
- Rugged In-Line PTT & Mic. can be used with gloves.
- Flexible Coil cord reinforced with kevlar.
- Multi-Tier ear tips for superior comfort & noise reduction.
- Loud and clear audio.
- 3-year warranty.

