


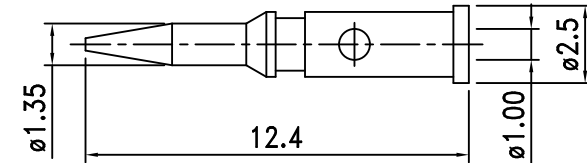


RECOMMENDED
CABLE STRIPPING DIM'S

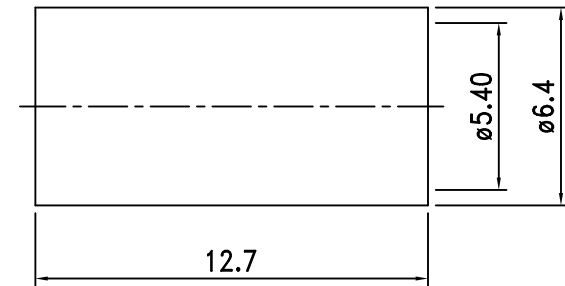

RECOMMENDED
USE CRIMP TOOL DIE 0.213"

REVISION		
REV	DATE	DESCRIPTION
△A	2/07/13	INITIAL
△B	4/01/19	Add Crimp Dims.

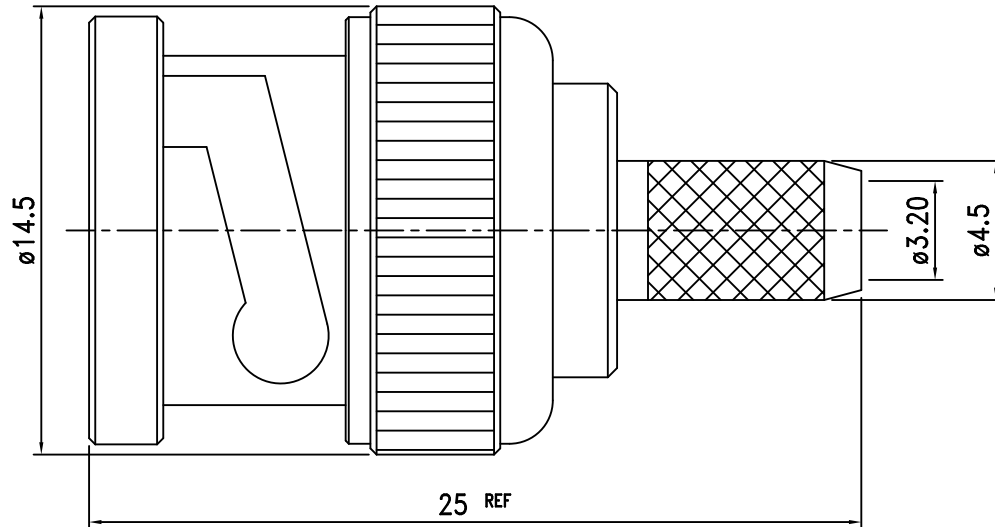

9.	Ferrule	Brass	1	Nickel
8.	Shell	Brass	1	Nickel
7.	Gasket	Rubber	1	Red
6.	Retaining Ring	SK-5	1	Nickel
5.	Spring	SK-5	1	Nickel
4.	Washer	Brass	1	Nickel
3.	Insulation	Delrin	1	None
2.	Pin	Brass	1	Gold
1.	Body	Brass	1	Nickel
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

TOLERANCE	
.X	+/- 0.2
.XX	+/- 0.1
.XXX	+/- 0.05
ANGLE	+/- 0.5

UNITS	SCALE
mm	NTS
SHEET 1 OF 1	

DRAWN BY:	CHECKED BY:	APPROVED BY:
PROPRIETARY AND CONFIDENTIAL THE INFORMATION IN THIS DRAWING IS THE SOLE PROPERTY OF TCC INDUSTRIES, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TCC INDUSTRIES, INC. IS PROHIBITED.		

GAD FILE	DESCRIPTION
13-10F-DGN	BNC Male Crimp for TCC Cable Group "F"



TCC INDUSTRIES INC.

7050 Village Drive unit E, Buena Park, CA 90621-2282
 Tel. 714.523.8885 - FAX. 714.562.0888
 E-Mail: info@tcinc.com Website: www.tcinc.com