

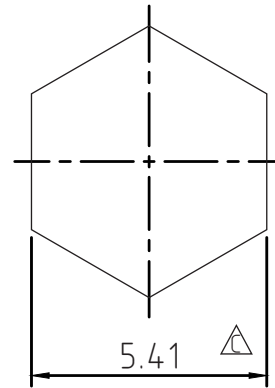
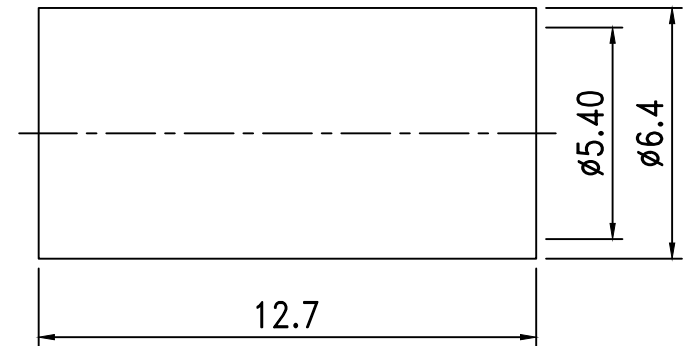


RECOMMENDED  
CABLE STRIPPING DIM'S

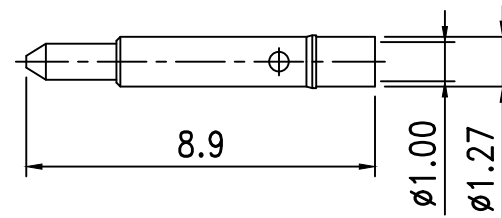

RECOMMENDED  
USE CRIMP TOOL DIE 0.213"

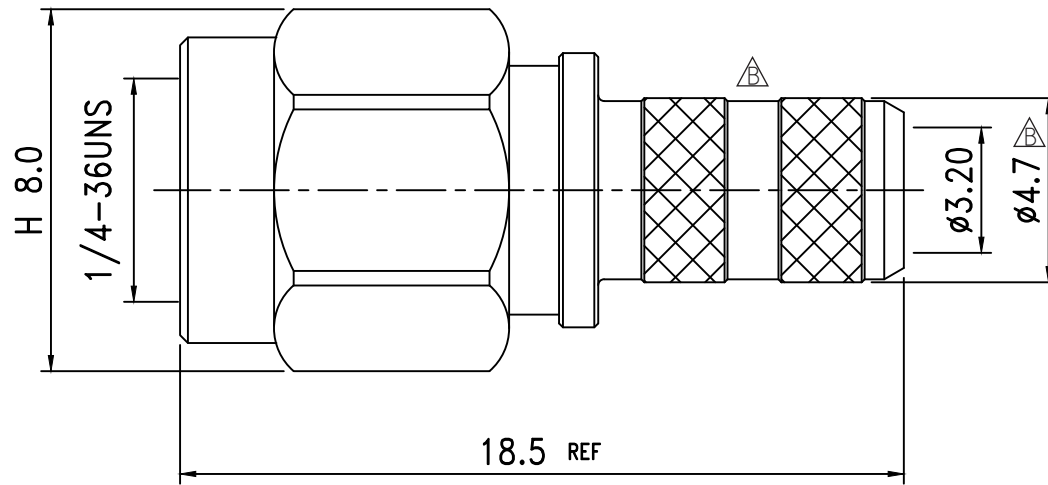

REVISION		
REV	DATE	DESCRIPTION
A	09/12/08	INITIAL
B	02/26/19	φ4.60 → φ4.70, Single to Dual Band Crimp
C	02/26/19	Add Crimp Dims.

7.	Ferrule	Brass	1	Nickel
6.	Shell	Brass	1	Nickel
5.	Gasket	Silicone	1	Red
4.	Retaining Ring	Stainless Steel	1	None
3.	Insulation	PTFE	1	White
2.	Pin	Brass	1	Gold
1.	Body	Brass	1	Nickel
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

<b>TOLERANCE</b> .X +/- 0.2 .XX +/- 0.1 .XXX +/- 0.05 ANGLE +/- 0.5	UNITS mm		DRAWN BY:	CHECKED BY:	APPROVED BY:	CAD FILE 19-03F-TGN
	SCALE NTS		SIZE A	PROPRIETARY AND CONFIDENTIAL THE INFORMATION IN THIS DRAWING IS THE SOLE PROPERTY OF TCC INDUSTRIES, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TCC INDUSTRIES, INC. IS PROHIBITED.		



**TCC INDUSTRIES INC.**

7050 Village Drive unit E, Buena Park, CA 90621-2282  
 Tel. 714.523.8885 - FAX. 714.562.0888  
 E-Mail: info@tccinc.com Website: www.tccinc.com