
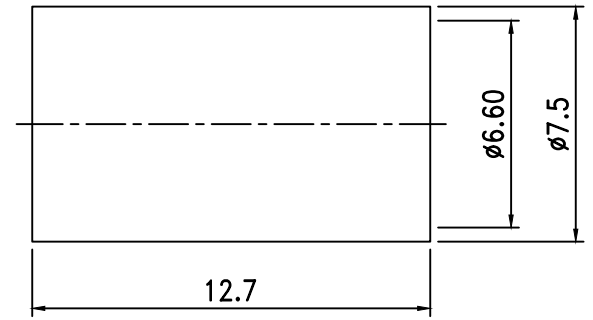
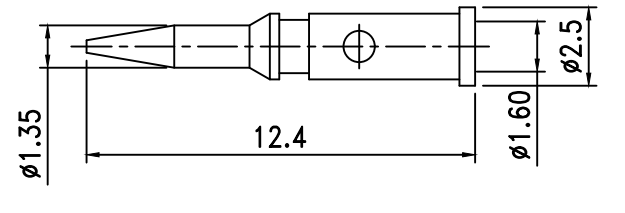


RECOMMENDED
CABLE STRIPPING DIM'S

RECOMMENDED
USE CRIMP TOOL DIE 0.255"

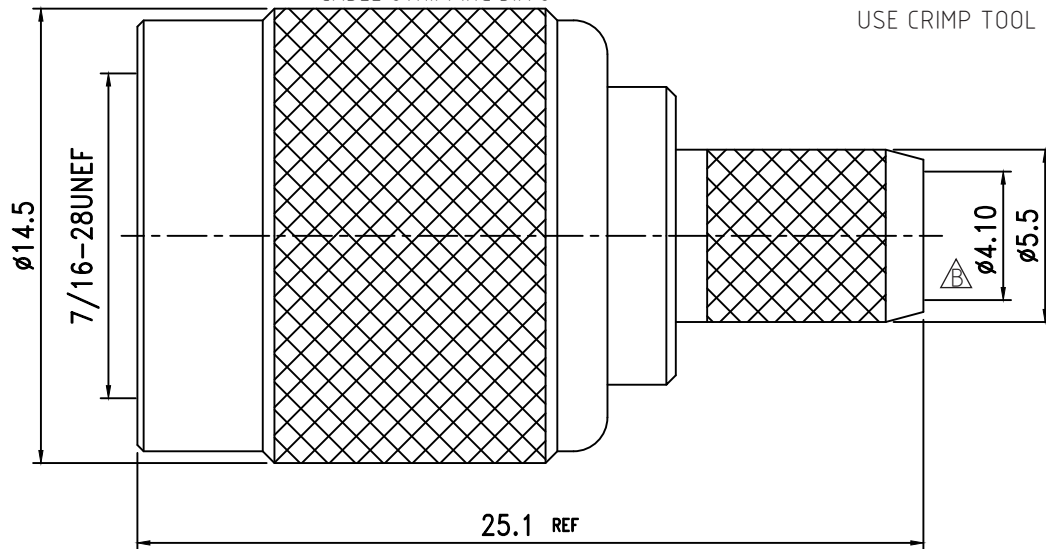

REVISION		
REV	DATE	DESCRIPTION
A	09/12/08	INITIAL
B	02/26/19	φ4.00 → φ4.10
C	02/26/19	Add Crimp Dims.

9.	Ferrule	Brass	1	Nickel
8.	Shell	Brass	1	Nickel
7.	Gasket	Rubber	1	Red
6.	Retaining Ring	SK-5	1	Nickel
5.	Insulation	Delrin	1	None
4.	Washer	Brass	1	Nickel
3.	Insulation	Delrin	1	None
2.	Pin	Brass	1	Gold
1.	Body	Brass	1	Nickel
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

TOLERANCE	
.X	+/- 0.2
.XX	+/- 0.1
.XXX	+/- 0.05
ANGLE	+/- 0.5

UNITS	SCALE
mm	NTS
SIZE	A

ROHS Compliant

DRAWN BY: _____ CHECKED BY: _____ APPROVED BY: _____

CAD FILE

15-10L2-DGN

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION IN THIS DRAWING IS THE SOLE PROPERTY OF TCC INDUSTRIES, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TCC INDUSTRIES, INC. IS PROHIBITED.

DESCRIPTION

TNC Male, Crimp, Straight
for TCC Cable Group "L2"



TCC INDUSTRIES INC.
7050 Village Drive unit E, Buena Park, CA 90621-2282
Tel. 714.523.8885 - FAX. 714.562.0888
E-Mail: info@tccinc.com Website: www.tccinc.com