


SPECIFICATIONS:

OPERATING FREQUENCY	0-3 Ghz
IMPEDANCE	50 Ω
VSWR	1:1.6 MAX.
INSERTION LOSS	0.5dB MAX.
GAS TUBE BREAKDOWN VOLTAGE	230V±15%
GAS TUBE IMPULSE BREAKDOWN	≤ 700V
GAS TUBE INSULATION RESISTANCE	≥ 10000 mΩ
MAX WITHSTAND VOLTAGE	5KV
POWER RATING	10W

Rev.	Date	Description
△A	2/7/05	INITIAL
△B	4/26/05	ADD SPECS
△C	2-19-07	Change P/N from 34-11-MF-TGN to 34-11-MF3-TGN. Add RoHS Symbol

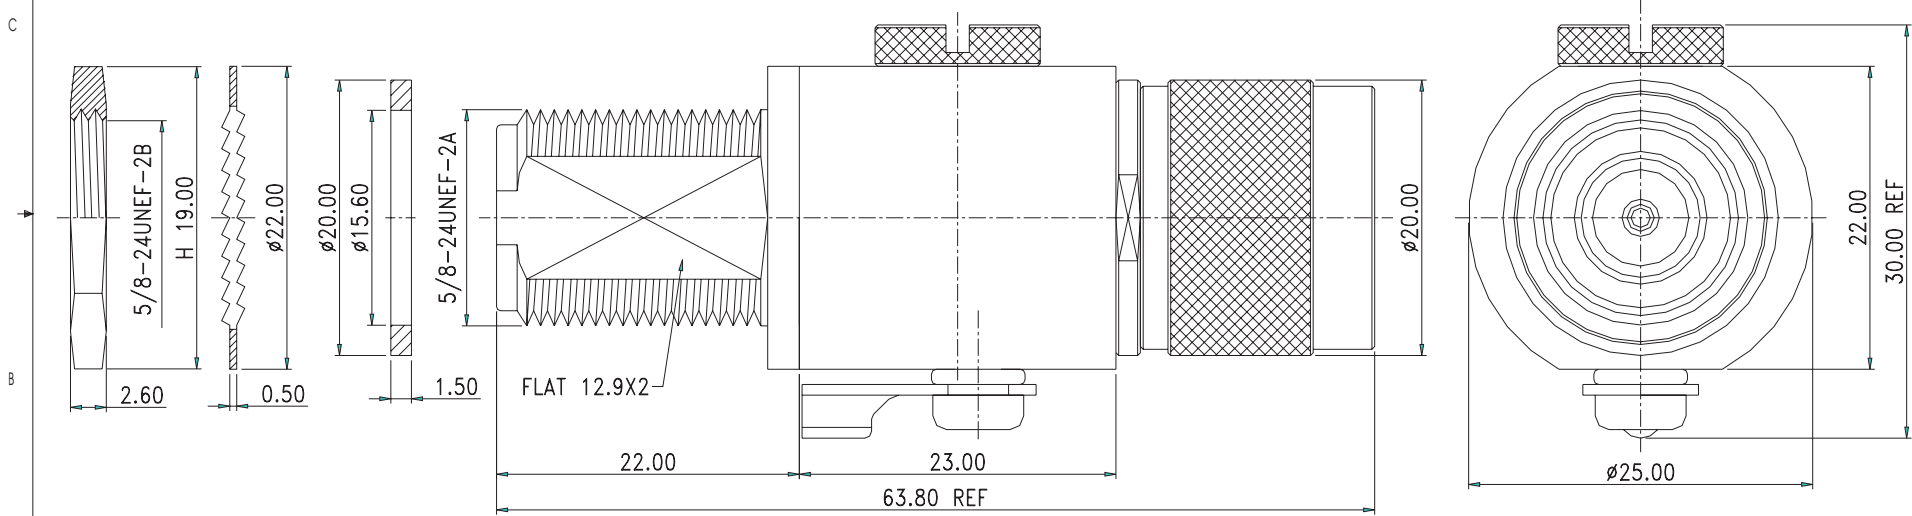

NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH
8.	Nut	Brass	1	Nickel
7.	Washer	Brass	1	Nickel
6.	Gasket	Silicone	1	Red
5.	Insulation	Teflon	2	None
4.	Pin	Brass	1	Gold
3.	Body3	Brass	1	Nickel
2.	Body2	Brass	1	Nickel
1.	Body1	Brass	1	Nickel



Part No.	34-11-MF3-TGN
Description	Surge Protector- N Male to N Female
Scale	NOT TO SCALE
THE DRAWING IN THIS PRINT AND INFORMATION THEREWITH ARE PROPRIETARY TO TCC AND SHALL NOT BE USED OR DISCUSSED IN WHOLE OR IN PART WITHOUT TCC CONSENT.	

TOLERANCE	
.X	±0.2
.XX	±0.1
.XXX	±0.05
ANGLE	±0.5°